



## INSTALLATION INSTRUCTIONS

### BAG INSTALLATION: 59823-00, 59893-00, 59909-00



#### WARNING

Please read and understand these instructions completely before installation to avoid possible injury to yourself or damage to the accessory or vehicle. If you are unsure of your ability, seek the help of a qualified mechanic.



#### WARNING

Do not wrap straps around brake cable, belt, chain or other moving parts. Make sure loose ends of straps can not get tangled in moving parts. Do not exceed swing arm bag weight capacity. Too much weight in the swing arm bag may cause loss of control, which could result in death or injury.


### 1. PREPARATION

- ▶ Tools required: scissors ✂
- ▶ Place motorcycle on a secure & level surface
- ▶ Hold bag up to swing arm to find best mounting location (FIG. 1)
- ▶ Remove the side cover from the bike
- ▶ Cut plastic film to fit swing arm, remove backing and adhere to swing arm (FIG. 2)

FIG. 1



FIG. 2

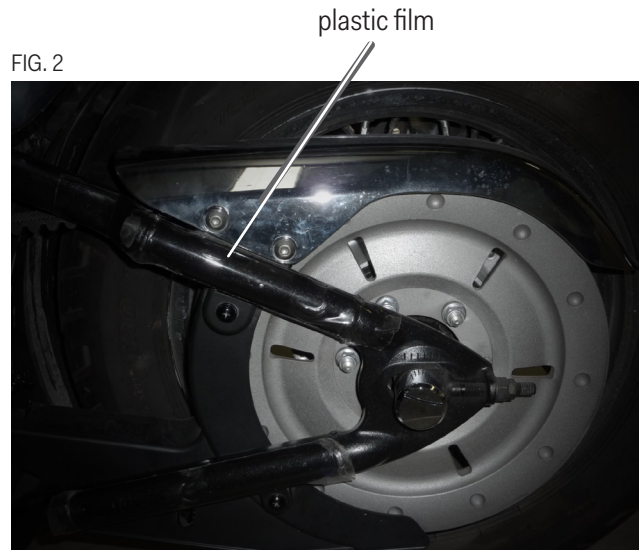

### 2. INSTALLATION

- ▶ Route strap through the bottom slots on the back of the swing arm bag .
- ▶ Loop around the bar, and route strap through the top slot of the back
- ▶ Pull tight, then pass through the buckle to secure strap.